


B4RN - Zyxel Router Quick Start Guide

Power Connection

1 – A B4RN engineer will have connected the router to the fibre wall outlet with a fibre patch cable.

Important: do not remove, bend, trap or damage this white fibre cable as this will cut off the B4RN service.

2 – Connect the power cable to the router and press the power button.

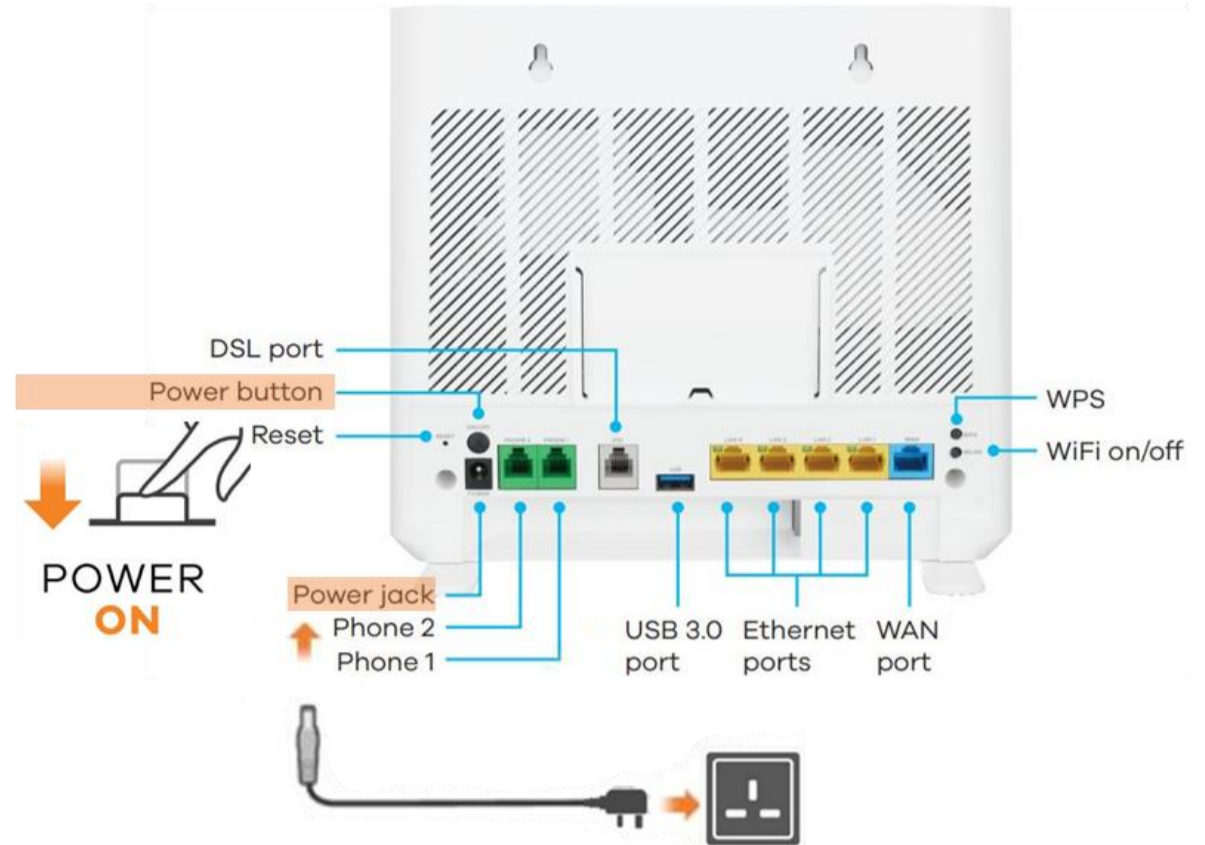


	POWER	Green On - Power is on. Blinking - Starting up. Red On - Malfunctioning. Blinking - Upgrading firmware.		INTERNET	Green On - Internet is ready. Blinking - Transmitting/receiving data. Red On - Attempted to get an IP address, but failed. Off - Internet is not ready, or gateway is in Bridge mode.
--	--------------	------------------------------------------------------------------------------------------------------------------------	--	-----------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Connections

Connect a computer or other device(s) to the yellow LAN ports using an Ethernet cable (Cat5e or above).

Important: B4RN recommends connecting as many devices as possible directly to the router via ethernet cable to take full advantage of the gigabit connection.

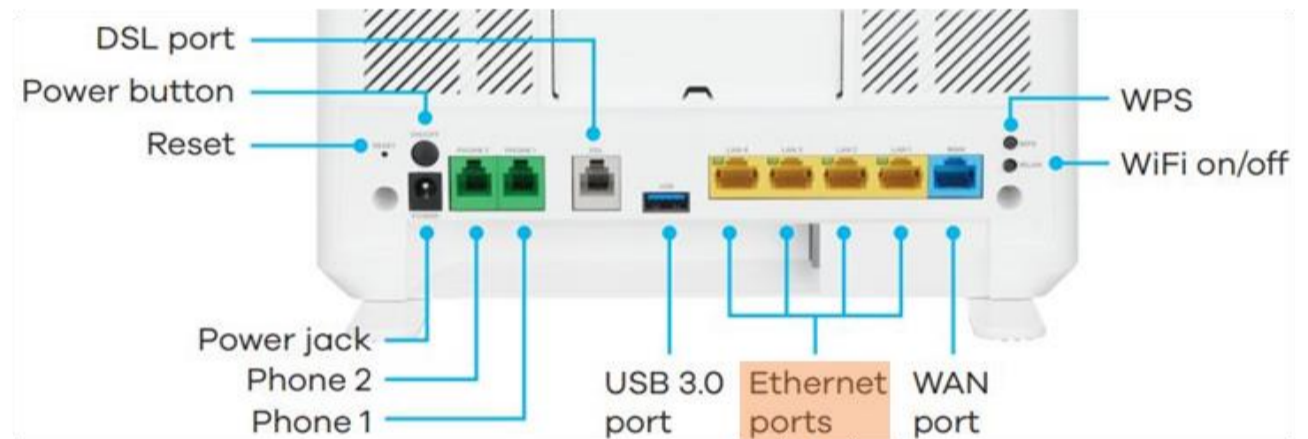

Note: Because B4RN is a Fibre to the Property connection, the "DSL port" is **not** required.

Meanwhile, with B4RN, the "Phone" ports can only be used for a VoIP service.

Wi-Fi Connection (using SSID)

1 – The SSID (or Network Name) and Wireless Key (sometimes called Password) are on a card at the rear of the router.

2 – On your smartphone, laptop or other Wi-Fi capable device(s), find this SSID. Enter the Wireless Key to connect.



Scan the QR code on the device label to see the SSID and Wireless Key on your smartphone


B4RN - Zyxel Router Quick Start Guide

Wi-Fi Connection (using WPS)

1 – Press the WPS button until the Wi-Fi 2.4G and 5G light up in amber.

2 – Press the WPS button on your device.

(If the WPS method fails, perform the “using SSID” method, above.)

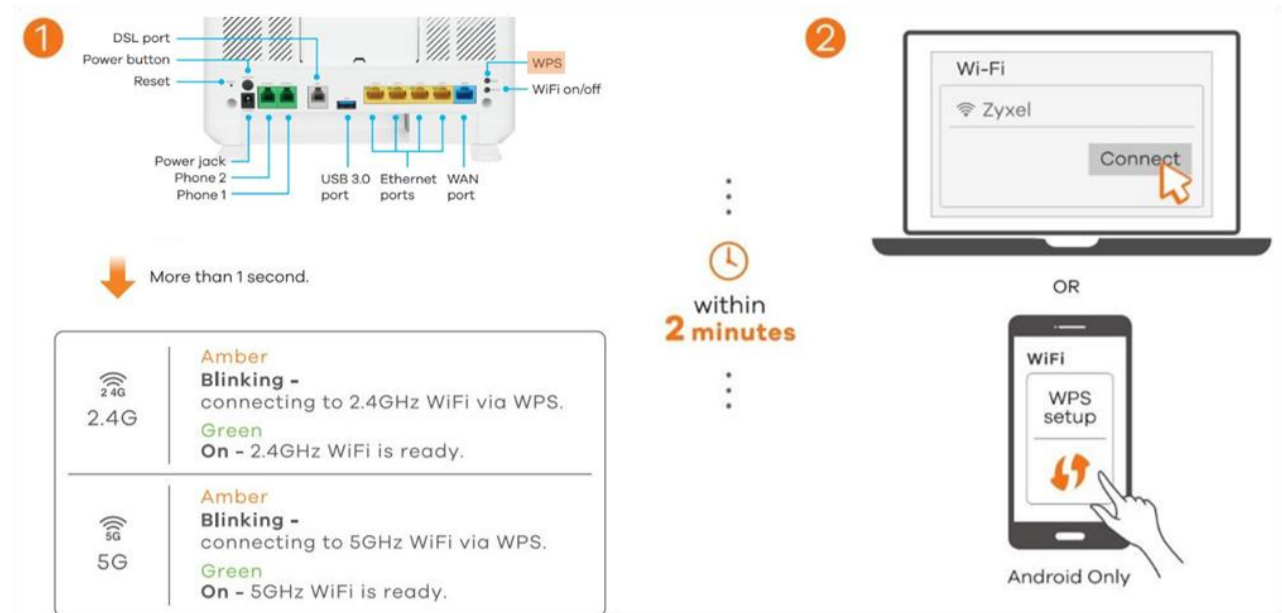


Managing the Router Using an Internet Browser

1 – Your device must be connected to the router via ethernet or Wi-Fi

2 – Open a web browser and go to <http://192.168.1.1>

3 – Enter the default Username (admin) and admin Login Password (on the device label), and then click Login.

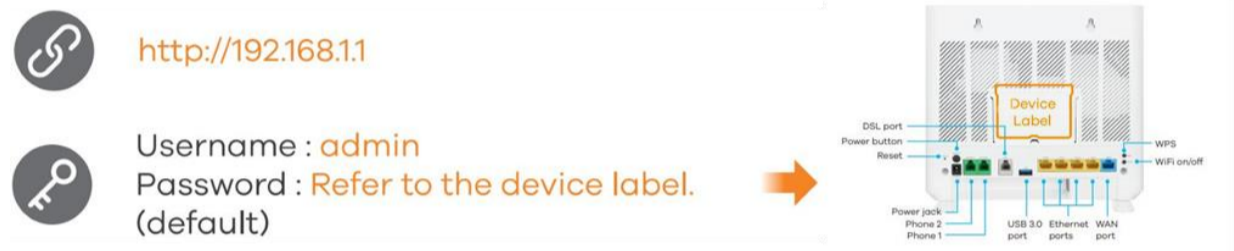

**Need more help? Contact the B4RN Helpdesk:
01524 238499 or helpdesk@b4rn.org.uk**